



30*30*10 MM SERIES

***馬達 MOTOR:**

4極無刷馬達 4pole brushless DC motor

***框 FRAME:**

成型條件 Injection molded thermal plastic

PBT+30%GF UL 94V-0

***扇葉 IMPELLER:**

成型條件 Injection molded thermal plastic

PBT+15%GF UL 94V-0

***絕緣 INSULATION:**

10MΩ/between unshackled wire

and frame at 500 VDC/m

***操作溫度與濕度**

OPERATION TEMPERATURE&HUMIDITY:

-10°C~+60°C,35%~85%RH


***儲存溫度與濕度**

STORAGE TEMPERATURE&HUMIDITY:


-40°C~+70°C,35%~85%RH

***導線 WIRES:**


UL1007,28AWG,Red(+),Black(-)

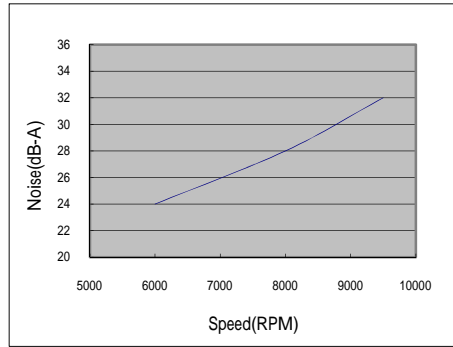

■ P&Q CURVE

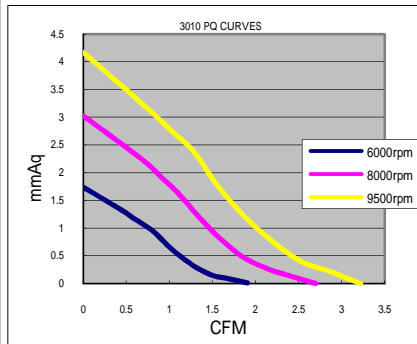

■ DIMENSIONS DRAWING

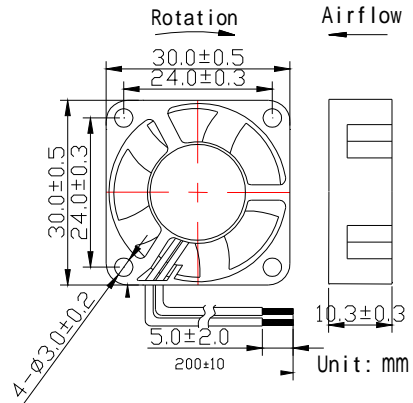

MODEL	Bearing	Rating Voltage	Rated Current	Rated Input Power	Operating Voltage range	Speed	Air Flow	Static Pressure	Noise
PART NO.		VDC	Amp	Watts	VDC	RPM	CFM	mm-H ₂ O	dB-A
A3010H05D	Two Ball	5	0.25	1.25	4.5 to 6	9500	3.22	4.17	32
A3010M05D			0.21	1.05	4.5 to 6	8000	2.81	3.87	28
A3010L05D			0.17	0.85	4.5 to 6	6000	1.79	1.97	24
A3010H05C	Ball & Sleeve		0.25	1.25	4.5 to 6	9500	3.22	4.17	32
A3010M05C			0.21	1.05	4.5 to 6	8000	2.81	3.87	28
A3010L05C			0.17	0.85	4.5 to 6	6000	1.79	1.97	24
A3010H05S	Sleeve		0.25	1.25	4.5 to 6	9500	3.22	4.17	32
A3010M05S			0.21	1.05	4.5 to 6	8000	2.81	3.87	28
A3010L05S			0.17	0.85	4.5 to 6	6000	1.79	1.97	24
A3010H12D	Two Ball	12	0.11	1.32	6 to 13	9500	3.22	4.17	32
A3010M12D			0.09	1.08	6 to 13	8000	2.81	3.87	28
A3010L12D			0.07	0.84	6 to 13	6000	1.79	1.97	24
A3010H12C	Ball & Sleeve		0.11	1.32	6 to 13	9500	3.22	4.17	32
A3010M12C			0.09	1.08	6 to 13	8000	2.81	3.87	28
A3010L12C			0.07	0.84	6 to 13	6000	1.79	1.97	24
A3010H12S	Sleeve		0.11	1.32	6 to 13	9500	3.22	4.17	32
A3010M12S			0.09	1.08	6 to 13	8000	2.81	3.87	28
A3010L12S			0.07	0.84	6 to 13	6000	1.79	1.97	24

USA Phone:+1-603-792-346 Fax:+1-603-792-3461

<http://www.vettecorp.com>

ASIA TAIWAN Phone:+886-2-7720-1188 Fax:+886-2-7720-1166

CHINA Phone:+86-769-83377088 Fax:+86-769-83710088

<http://www.vette.com.tw>